




SUNPOWER®

ecobat
BATTERY

SunPower® Flexible Solar Panels | SPR-E-Flex-100 Datasheet


High Power and Flexible

Made with SunPower's highest power Gen II back contact cells, SunPower's flexible panels deliver the highest power output and the highest charging capacity in their product class. SunPower's panels are constructed with top-grade, light-weight polymer materials, allowing for easy transport, installation and panel flexing up to 30 degrees.

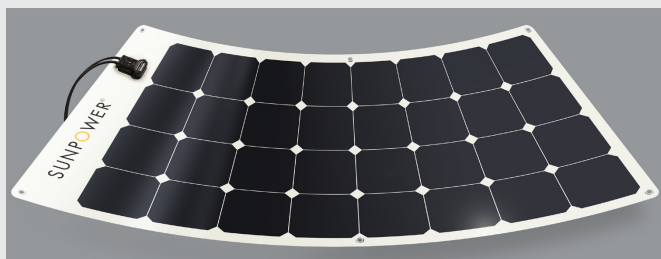

Designed for Toughness

The SunPower Maxeon® Solar Cell is the only cell built on a solid copper foundation. Flexible panels made with SunPower cells are resistant to power loss via cracking and corrosion, unlike conventional cells, which are much more likely to lose power when bent or subjected to a moist environment. SunPower flexible panels are the #1 choice for customers due to the combination of high power and cell ruggedness.

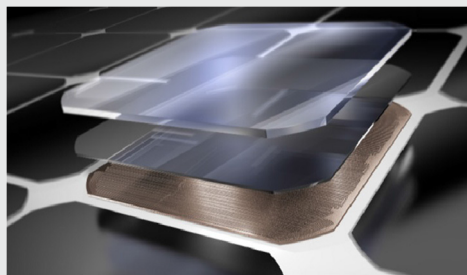

Maxeon® Solar Cells: Fundamentally better
Engineered for performance, designed for durability.

Easy and Low Cost Installation

The panel can be installed with adhesives and/or use of stainless steel grommets in the panel. The panels have standard quickconnect cables. An easy-to-follow installation guide is provided with each panel.

Warranty: 5 years limited power warranty of 80% of the minimum specified power rating. Manufactured by SunPower in SunPower's European factory.


Typical Electrical Data

at STC: 25°C, 1000 W/m² and AM 1.5

| Model | SPR-E-Flex-100 |
|--|----------------|
| Nominal Power (P _{nom}) | 100 W |
| Power Tolerance | +6/-3% |
| Rated Voltage (V _{mpp}) | 17.1 V |
| Rated Current (I _{mpp}) | 5.9 A |
| Open-circuit voltage (V _{oc}) | 21.4 V |
| Short-circuit current (I _{sc}) | 6.3 A |
| Power Temp Coefficient | -0.35%/°C |
| Voltage Temp Coefficient | -58.9 mV/°C |
| Current Temp Coefficient | 2.6 mA/°C |
| Max. System Voltage | 45 V |
| Series Fuse Rating | 15 A |

Mechanical Data

| | |
|-------------------|---|
| Solar Cells | 32 Prime monocrystalline 23% efficiency SunPower IBC cells |
| Junction Box | TE 1-21-2152049-1 |
| Connectors | PV4-S |
| Cables | 4 mm ² (0.16in ²), 12 AWG, 450 mm (17.7 in) long |
| Grommets | 316 Stainless Steel |
| Charge Controller | None provided |
| Weight | 4.4 lb (2 kg) |
| Panel Dimensions | 1153 x 556 x 20 mm with Jbox, 2 mm w/o Jbox |

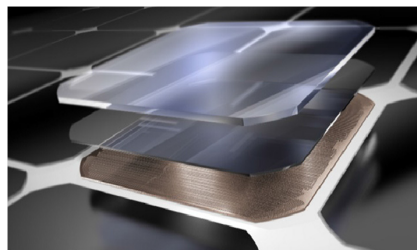

Please read the safety and installation guide.
Document # 523809 Rev D / LTR_US

